



PRODUCT CATALOG

PEDESTRIAN ITEMS



RED/BLUE ZONE
WARNING LIGHT



BEACON LIGHT



RED/BLUE
SPOT LIGHT



HIGH BEAM
HEAD LIGHT



RED/BLUE
ARC LIGHT



OVERHEAD
CRANE
WARNING LIGHT



RED/BLUE
ARROW LIGHT



PROJECTOR
LOGO LIGHT

PEDESTRIAN ITEMS



**BIOMETRIC
ACCESS
CONTROL
SYSTEM**



**FORKLIFT OVER
SPEED
ALARM SYSTEM**



**SEAT BELT
ALARM
SYSTEM**



**AUDIBLE AND
VISUAL ANTI
COLLISION
ALARM SYSTEM**



**ANTI
COLLISION
RADAR SYSTEM**



**LED BEACON
WARNING
LIGHT**



**FORKLIFT WIRE
WIRELESS
CAMERA
SYSTEM**

RED / BLUE ZONE DANGER AREA WARNING LIGHT



GP-INNOV-LZ60



- LED Power: 60W 12pcs*5W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE /GREEN
- Lens Material: PC
- Material: Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: Line 50000 hours above life time
- Product size:250*73*80 mm

INNOVATION WITH SAFETY

GP-INNOV-LZ30



- LED Power: 30W 6pcs*5W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE /GREEN
- Lens Material: PC
- Material: Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: Line 50000 hours above life time
- Product size:136*59*72 mm

RED / BLUE ZONE DANGER AREA WARNING LIGHT



GP-INNOV-LZ18



- LED Power: 18W 6pcs*3W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67 Color : RED / BLUE Lens
Material: PMMA
- Material: Diecast aluminum housing
- Mounting Bracket: Alu firm bracket
- Beam: Line 50000 hours above life time
- Product size:180*69*67 mm

GP-INNOV-LZ10



- LED Power: 10W 2pcs*5W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE /GREEN
- Lens Material: PC
- Material: Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: Line 50000 hours above life time
- Product size:79*59*76mm

RED / BLUE SPOT WARNING LIGHT



GP-INNOV-SZ10



- LED Power: 10W 2pcs*5W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE
- Lens Material:PMMA
- Material:Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: SPOT
- Operation temperature -40°C~60°C
- Product size:142*81*130 mm
- Lumen: 500lm

GP-INNOV-LZ10-B



- LED Power: 10W 2pcs*5W Osram
- Voltage: AC: 110-240V DC: 10-24V
- Discharging Time: 4-5H
- Color : RED / BLUE
- Lens Material:PMMA
- Material:Diecast aluminum housing
- Charging Time: 4-5H
- Beam: SPOT
- Battery: 7.4V 1800mah*4 Li-ion battery

RED / BLUE SPOT WARNING LIGHT



GP-INNOV-LZ20



- LED Power: 20W 4pcs*5W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE
- Lens Material:PMMA
- Material:Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: SPOT
- Operation temperature -40°C~60°C
- Product size:143*62*128 mm
- Lumen: 1000lm

RED / BLUE ARC WARNING LIGHT



GP-INNOV-AZ30



GP-INNOV-LZ20



- LED Power: 30W 2pcs*15W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/GREEN
- Lens Material:PMMA
- Material:Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: ARC
- Lifespan: 50000 Hours
- Product size142*81*130 mm

- LED Power: 20W 1pcs*20W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/GREEN
- Lens Material:PMMA
- Material:Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: ARC
- Lifespan: 50000 Hours
- Product size:102*90*95 mm

RED / BLUE ARC WARNING LIGHT



GP-INNOV-LZ40



- LED Power: 10W 2pcs*20W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/GREEN Lens
- Material: PMMA
- Material: Diecast aluminum housing
- Mounting Bracket: Stainless Steel
- Beam: ARC
- Lifespan: 50000 Hours
- Product size:102*90*95 mm

RED / BLUE ARROW WARNING LIGHT



GP-INNOV-ARZ18



- LED Power: 18W 9pcs*2W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/GREEN
- Lens Material: PMMA
- Material: Diecast aluminum housing
- Mounting Bracket: Alu Firm
- Beam: ARROW
- Lifespan: 50000 Hours
- Product size 78*78*105 mm

GP-INNOV-ARDZ18



- LED Power: 18W 9pcs*2W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/GREEN
- Lens Material: PMMA
- Material: Diecast aluminum housing
- Lifespan: 50000 Hours
- Mounting Bracket: Alu Firm
- Beam: ARROW DANCING
- Product size 78*78*105 mm

RED / BLUE ARROW WARNING LIGHT



GP-INNOV-ARLZ08



- LED Power: 08W 4pcs*2W Osram
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED/BLUE/GREEN
- Lens Material: PMMA
- Material: Diecast aluminum housing
- Mounting Bracket: Alu Firm
- Beam: FLASHING SPOT
- Lifespan: 30000 Hours
- Product size 78*78*105 mm

LED BEACON WARNING LIGHT



GP-INNOV-BL40-BS



- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way: Screw mounted type
- Product size:131*131*91 mm

GP-INNOV-BL40-BSS



- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way: Screw mounted type
- Product size:131*131*65 mm

LED BEACON WARNING LIGHT



GP-INNOV-BL40-BSM



- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way:Magnet & Sucked base type

GP-INNOV-BL40-BSSM



- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way:Magnet & Sucked base type

LED BEACON WARNING LIGHT



GP-INNOV-BL40-BSD




- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way:Din stem base type

GP-INNOV-BL40-BSSD



- LED Power: 40pcs*SMD2835
- Operating Voltage: DC 10-110V
- Waterproof rate: IP 65
- Color : Amber
- Material: Cover-PC, Base-ABS
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 3 Mode (On, Off, Sound)
- With buzzer (104 dB)
- Fixed Way:Din stem base type

OVER HEAD CRANE WARNING LIGHT

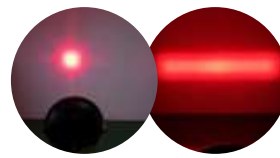

GP-INNOV-OZ45



- Light source: High-power Cree LED 9pcs*5W
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/WHITE
- Led power: 45W
- Material:Diecast aluminum housing
- Working environment: -40°-80°
- Beam: Spot/line beam
- Lifespan: 50000 Hours
- Product size L:140mm W:87mm H:170mm

GP-INNOV-OZ60




- 7"inch spot/line light
- Light source: High-power Cree LED 12pcs*5W
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/WHITE
- Led power: 60W
- Material:Diecast aluminum housing
- Working environment: -40°-80°
- Beam: Spot/line beam
- Lifespan: 50000 Hours
- Product size 182*160*180

OVER HEAD CRANE WARNING LIGHT



GP-INNOV-OZ72

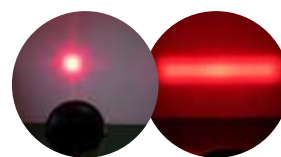

- 9"inch spot/line light
- Light source: High-power Cree LED 24pcs*5W
- Operating Voltage: 10-48V DC
- Waterproof rate: IP 67
- Color : BLUE
- Led power: 140W
- Material:Diecast aluminum housing
- Working environment: -40°-80°
- Beam: Spot/line beam
- Lifespan: 50000 Hours
- Product size 200*170*140

GP-INNOV-OZ180



- 180 Watts 36 x 5W OSRAM LEDs
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Color : RED / BLUE/WHITE
- Led power: 180W
- Material:Diecast aluminum housing
- Working environment: -40°-80°
- Beam: Spot/line beam
- Lifespan: 50000 Hours
- Product size L:250mm W:140mm H:180mm

LED SIGN PROJECTOR GOBO LIGHT



GP-INNOV-PZ30



- LED Power: 30 WATT
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Lens Material: F0.3
- Mounting Bracket: Stainless Steel
- Beam: Stirless logo
- Lumen: 3600 LM
- Product size 126.4*62*118MM

INNOVATION WITH SAFETY

GP-INNOV-PZ50



- LED Power: 50 WATT
- Operating Voltage: 10-80V DC
- Waterproof rate: IP 67
- Lens Material: F0.3
- Mounting Bracket: Stainless Steel
- Beam: Stirless logo
- Lumen: 6000 LM
- Product size 92*155MM

OVER HEAD PROJECTOR LOGO LIGHT



GP-INNOV-PZ150



- LED Power: 150 WATT
- Operating Voltage: AC 85 - 260 Volts
- Waterproof rate: IP 67
- Full Aluminum Housing
- Lens Rang Bright - Up to 50ft, Dim - Up to 120ft
- 50000 Hours Lifspan

INNOVATION WITH SAFETY

OVER HEAD ULTRA PROJECTOR LOGO LIGHT



GP-INNOV-PZ30-OHU



- LED Power: 30 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 320*210*130MM

INNOVATION WITH SAFETY

GP-INNOV-PZ50-OHU



- LED Power: 50 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 320*210*130MM

OVER HEAD ULTRA PROJECTOR LOGO LIGHT



GP-INNOV-PZ80-OHU



- LED Power: 80 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 330*145*210MM



GP-INNOV-PZ100-OHU



- LED Power: 100 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 330*145*210MM

OVER HEAD ULTRA PROJECTOR LOGO LIGHT



GP-INNOV-PZ200-OHU



- LED Power: 200 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 330*145*210MM

GP-INNOV-PZ300-OHU



- LED Power: 300 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 430*210*270MM

OVER HEAD ULTRA PROJECTOR LOGO LIGHT



GP-INNOV-PZ400-OHU



- LED Power: 400 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 550*230*320MM

GP-INNOV-PZ600-OHU



- LED Power: 600 WATT
- Operating Voltage: 110-220V AC
- Waterproof rate: IP 65
- Full Aluminum Housing
- Stirless or whirling logo, has a switch to control it
- 50000 Hours Lifspan
- Lens Material: F0.3
- Product size 550*230*320MM

Forklift Biometric Access Control System

GP-INNOV-BSTS100D

- Operating Voltage : DC 12V, 3A
- Category : Fingerprint Access Control System
- Display Size : 2.4 " TFT
- Tamper-proofs switch and multiple alarm outputs
- Card Capacity : 1500
- Fingerprint Capacity : 5000
- Verification method : Password, Fingerprint, Card
- Operating Temperature : 0°C - 40°C
- Compatlble for : Diesel Type

GP-INNOV-BSTS100E

- Operating Voltage : DC 12V, 3A
- Category : Fingerprint Access Control System
- Display Size : 2.4 " TFT
- Tamper-proofs switch and multiple alarm outputs
- Card Capacity : 1500
- Fingerprint Capacity : 5000
- Verification method : Password, Fingerprint, Card
- Operating Temperature : 0°C - 40°C
- Compatlble for : Electric Type



Forklift Biometric Access Control System



GP-INNOV-BSTX7D

- Operating Voltage : DC 12V, 3A
- Category : Fingerprint Access Control System
- Card Capacity : 500
- Fingerprint Capacity : 500
- Verification method : Password, Fingerprint, Card
- Operating Temperature : 0°C - 40°C
- Compatlble for : Diesel Type



GP-INNOV-BSTX7E

- Operating Voltage : DC 12V, 3A
- Category : Fingerprint Access Control System
- Card Capacity : 500
- Fingerprint Capacity : 500
- Verification method : Password, Fingerprint, Card
- Operating Temperature : 0°C - 40°C
- Compatlble for : Electric Type



Safety Belt Alarm System



GP-INNOV-SB60-EH

- Operating Voltage: DC 9~60V
- Waterproof rate: IP 65
- Working Current: Silent mode ≤ 9MA , Playback mode ≤ 360MA (DC9V)
- Volume soundness: 105dB
- Response Time: 1 Sec
- Operation temperature -30°C~65°C
- Red wire positive pole, black wire negative pole, brown reverse line, white left turn, green right turn, yellow 12V output
- Sound : Please Fasten your seat belt/ Bee-Bee/ Kripya Seat Belt Lagye



Voice alert / reminding function



Safety Belt Alarm System



GP-INNOV-SB60-EHB

- Operating Voltage: DC 10~48V
- Waterproof rate: IP 65
- Working Current: Silent mode $\leq 9\text{MA}$, Playback mode $\leq 360\text{MA}$ (DC9V)
- Volume soundness: 105dB
- Response Time: 1 Sec
- Operation temperature -30°C~65°C
- Red wire positive pole, black wire negative pole, brown reverse line, white left turn, green right turn, yellow 12V output
- Sound : Please Fasten your seat belt/ Bee-Bee/ Kripya Seat Belt Lagye With Beacon Light



Voice alert / reminding function



ANTI-COLLISION SYSTEM (REVERSE PARKING SENSOR)



GP-INNOV-AC3M-EB

- 4 Sensors LED Parking Sensor with built-in buzzer Kit
- 1XIP68 Waterproof Host
- 4XSensors
- 4X5 Meter extension cable for sensors
- 1XLED display with buzzer
- 1X5 Meter extension cable for led display
- Working voltage:DC12V-24V
- Operation temperature:-30+70°C
- Response time:0.05s/sensor
- Detecing range:0-5 meters
- Detecing angle:Horizontal/Vertical 60-80 degree
- Available Sensor Type:Flush mount type/ L bracket hanging type/ Butterfly type



ANTI-COLLISION SYSTEM (REVERSE PARKING SENSOR)



GP-INNOV-AC3M-7LCD

- 4 Sensors LCD Video Parking Sensor with 7" screen & buzzer Kit
- 1XIP68 Waterproof host
- 4XSensors
- 4X5 Meter extension cable for sensors
- 1XBuzzer
- 1X5 Meter extension cable for buzzer
- 1X720P/1080P 7" HD 1024*600 IPS screen
- 1X5 Meter extension cable for screen
- 1X720P/1080P AHD IP68 waterproof IR camera
- 1X5 meter cable for camera
- Working voltage:DC12V-24V
- Operation temperature:-30+70°C
- Response time:0.05s/sensor
- Detecing range:0-5meters
- Detecing angle:Horizontal/Vertical 60-80 degree
- Available Sensor Type:Flush mount type/ L bracket
- hanging type/ Butterfly type



Forklift Wireless Camera System

GP-INNOV-WCS7-720PHD

- Operating Voltage: DC 9~60V
- Power supply: +9~+30V
- Current Consumption: TYPE:170mA, Max. 250mA
- Resolution: 720P
- Frame Rate: 25f/s 30f/s
- Operating Temperature: -10~+60°C
- Video Codec: MPEG4
- Voice Sample Rate: 16KHz/12BIT ADC ADPCM/PCM
- Operation Frequency: 2400 ~ 2483.5MHz
- Line of Sight Range: >200M
- LCD display screen size: 7inch
- Resolution: 1024*600
- Power supply: +9~+30V
- Current Consumption: TYPE:380mA Max.480mA
- Video Codec: AVI
- Frame Rate: 25f/s 30f/s
- Operating Temperature: -10~+60°C
- SD Card Storage: Max 128GB



FORKLIFT OVER SPEED ALARM



GP-INNOV-OSL-V4-D

- Operating Voltage: DC 12-48V, Compatible Engine : Diesel
- Using high-quality PC+ABS shell material, long life and anti-aging
- Function: Overspeed sound and light alarm
- Operating Temperature: -10~+60 °C
- Locking Function: With overspeed alarm locking function, the alarm locking time is adjustable from 0 to 99 seconds
- With 485 communication port, it can expand and apply various functions
Remote control distance $\leq 1M$
- Alarm loudness $\leq 100db$ (midrange speaker)
- Protection class IP65

GP-INNOV-OSL-V4-E

- Operating Voltage: DC 12-48V, Compatible Engine : Electric
- Using high-quality PC+ABS shell material, long life and anti-aging
- Function: Overspeed sound and light alarm
- Operating Temperature: -10~+60 °C
- Locking Function: With overspeed alarm locking function, the alarm locking time is adjustable from 0 to 99 seconds
- With 485 communication port, it can expand and apply various functions
Remote control distance $\leq 1M$
- Alarm loudness $\leq 100db$ (midrange speaker)
- Protection class IP65



AUDIBLE AND VISUAL ANTI COLLISION ALARM SYSTEM



GP-INNOV-AV3-500A

- Power supply: DC9-30V/AC110-220V
- Operating Current:
- (i) Standby status: $\leq 20\text{MA}$ (DC12V)
- (ii) Playback status: $\leq 900\text{MA}$ (DC12V)
- Sound format: MP3
- Maximum audio output: 15W
- Alarm loudness: Upto 120db
- Light intensity: 750LUX
- Ambient temperature: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
- Protection level: IP65
- Storage Capacity: 4Mbit~64Mbit
- Total Sound length: 2000 seconds
- Playback effects: U disk to achieve differnt Voices
- Voice Adjust: By Remote
- Effective distance: ≤ 5 meters
- Support microwave induction mode: Yes
- Induction distance of microwave induction mode: 6-8 meters



LED BEACON WARNING LIGHT



GP-INNOV-J1103R-S



- LED Power: 5pcs*SMD2835
- Operating Voltage: AC/DC12-220V
- Waterproof rate: IP 54
- Color : RED
- Material: Cover-PC
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 2 Mode (On, Off, Sound)
- With buzzer (90 dB)
- Fixed Way: Screw mounted type


GP-INNOV-J1103G-S



- LED Power: 5pcs*SMD2835
- Operating Voltage: AC/DC12-220V
- Waterproof rate: IP 54
- Color : GREEN
- Material: Cover-PC
- Operation Temperature: -30°C~50°C
- Flashing Patterns: 2 Mode (On, Off, Sound)
- With buzzer (90 dB)
- Fixed Way: Screw mounted type



**Why
GP i-NNOV ?**

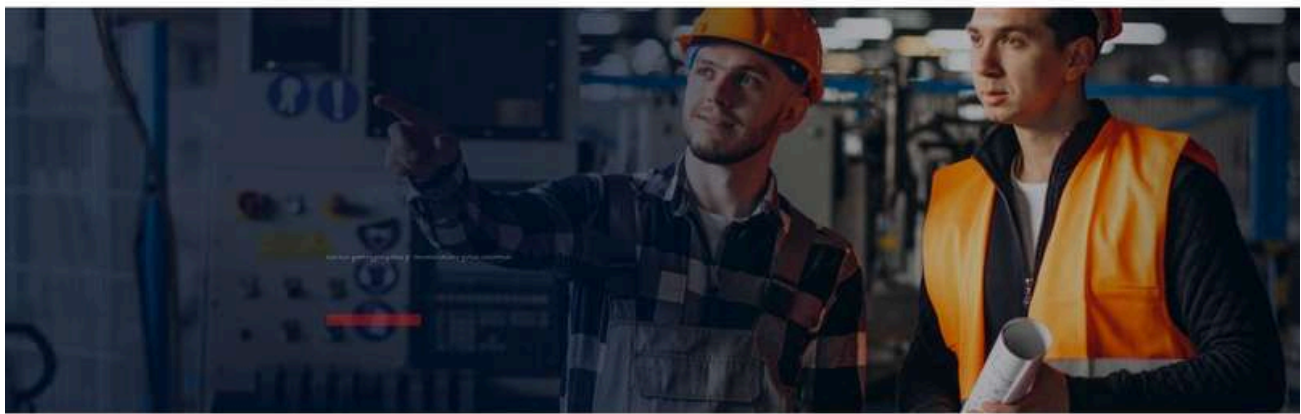

AI-Powered IoT Solutions

i-NNOV is a hyper-growth technology company committed to enhancing industrial safety through AI and IoT-powered solutions. Our primary focus is to avert accidents and improve

FOLLOW US





MARKETED BY: GATI POWER CONTROL & SERVICES

**REGD. ADD. :- G-108, Krish Seasons Nikunj Near Honda NORTH GATE KHUSHKHERA
Bhiwadi, Teh-Tijara, Alwar, Rajasthan, 301707**

Email id : sales@gatipower.com Mobile No : +91-7413052781 / 8426881913

MANUFACTURED BY : ELEPTOFY TECHNOLOGIES PRIVATE LIMITED

**REGD. ADD. :- 08 Ashok Vihar, Rangala Petrol Pump, Akera, Taoru, Nuh
Gurgaon, Haryana, 122107**